HC-10182

Brass Float Valve

PN16

Feature & Benefits

- WRAS certified
- Europe Brass CW617N
- PN14 1” to 2”
- Temperature： -10°C to 85°C
- High pressure



Materials

NO.	PART	MATERIAL
1	Float Ball	PE
2	Connecting Rod	Brass
3	Connecting Rod	Brass
4	Spol	Brass
5	Rubber Mat	NBR
6	Body	Brass CW617N
7	Flange Nut	Brass
8	Pin	Brass

Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Dimensions

Size (mm)	Plastic Ball	G (mm)	A (mm)	L (mm)
15	4 1/2” x 5/16” W	1/2”	304	70.5
20	5” x 5/16” W	3/4”	302	74.5
25	6” x 7/16” W	1”	405	87.5
32	8” x 5/16” W	1 1/4"	435	165.5
40	10” x 9/16” W	1 1/2"	435	168.5
50	12” x 5/8” W	2”	435	168.5

Dimensional Drawing

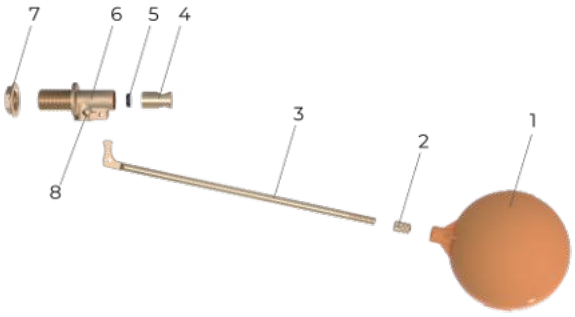

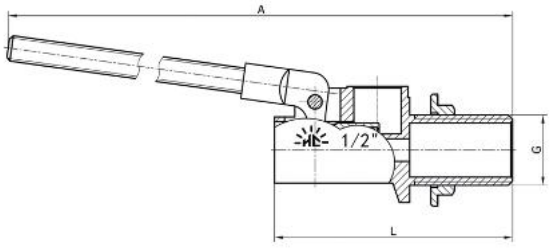

Pressure & temperature ratings

