TECHNICAL DATASHEET WRAS APPROVED GATE VALVE





Item No.: HC-10502

1 CERTIFICATION INFORMATION

Declaration of conformity: WRAS approved gate valve. Confirmation of the approval can be obtained from the WRAS Approvals Directory (www.wras.co.uk/directory)

Approval Number: 240404009 WRAS

PRODUCT BASICS

Product Name: WRAS APPROVED GATE VALVE (FXF series)

Purpose: Gate valves are mainly used in urban water supply and drainage systems, firefighting systems, water treatment systems, domestic water systems, air conditioning heating systems, etc.

Manufacturer (supplier): HOME CREATOR TECHNOLOGY CO., LTD (Qinggang, Yuhuan, Taizhou, Zhejiang Province, China).

MAIN TECHNICAL DATA AND CHARACTERISTICS 3.1 SPECIFICATIONS


Table

Connection thread, inch			3/4"	1"	11/4"	11/2"	2"		
Nominal diameter DN, mm			20	25	32	40	50		
Nominal pressure PN, MPa			2.0	2.0	2.0	2.0	2.0		
Operating temperature range, °C			-20 to +120						
Ambient temperature, °C			-20 to +60						
Maximum f	10								
Ş		Class "A"							
Connec	Parallel								
	average full-service life	30 years old							
Uptime	average full resource	55,000 cycles							
	MTBF		25,000 cycles						

3.2 MATERIAL OF MANUFACTURE AND CONSTRUCTION OF GATE VALVE

Female-Female thread (FxF)





Name	Material		
Nut (1)	Brass		
Nameplate (2)	Aluminum		
Hand Wheel (3)	Aluminum		
Pressure Cap (4)	Brass		
Lead Screw (5)	Brass		
O-ring (6)	EPDM		
Cap (7)	Brass CW617N		
Gate (8)	Brass		
Valve Body (9)	Brass CW617N		

- HOME CREATOR brass products are made by hot stamping of brass grade CW617N as per the European standard EN12165.
 The Rubber Mat are made of EP8018F EPDM according to European standards.

3.3 GATE VALVEFemale-Female thread (FxF)



3.4 CROSS SECTION

Female-Female thread (FxF)




Table 3

lk	DN	Size	Weight, g	Overall dimensions, mm				
Item				В	D	Н	1	Α
HC-20132	15	1/2"	255	13.5	61	69.3	12	47
HC-20132	20	3/4"	368	19	61	79	14.5	50
HC-20132	25	1"	533	23	64.5	93.8	15	56.3
HC-20132	32	1 1/4"	898	32	81.5	115	18	63
HC-20132	40	1 1/2"	1051	39	96	128	18	68
HC-20132	50	2"	2055	48	103	158	20	80

INSTALLATION AND OPERATION

- 4.1 Installation of a gate valve should be carried out by a specialist or a specialized organization in accordance with the Installation Requirement Notes (IRNs) "WRAS water regulation approval schedule."
- 4.2 The pipe thread is connected to the gate valve. When installing and tightening, the gate should be in a fully closed state. The pipe should be clean and free of sediment and rust, and the sealing material, such as raw material tape, should be clean and clean.
- 4.3 During installation, when tightening the valve, the key must be captured by the hexagon of the housing closest to the connection thread. It is not allowed to exceed the tightening moments indicated in the table below:

Size, inch	1/2"	3/4"	1"	11/4"	11/2"	2"
Maximum torque, N·m	75	100	125	160	200	250

4.4 When installing and tightening, the pipe should be perpendicular to the end face of the valve body. Use a wrench on the hexagonal or octagonal part on the same side of the thread instead of the hexagonal or octagonal part on the other end, as shown in Figure 1.





Figure 1

4.5 When both ends of the gate valve are internally threaded, the length of the external thread at the pipe end must be controlled to prevent the pipe end thread from pushing against the internal thread end face of the gate valve when the pipe end thread is screwed in, causing deformation of the valve body sealing surface and affecting the sealing performance, as shown in Figure 2.



4.6 When installing the gate valve, the pipes at both ends must be in the same straight line as the valve to avoid bending up and down, front and back, and misalionment, as shown in Figure 3.

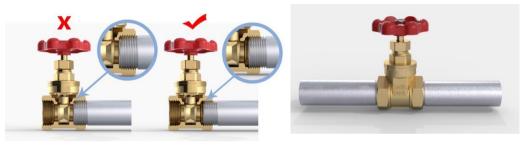


Figure 2 Figure 3

- 4.7 When opening and closing the gate valve, the clockwise direction is closed and the counterclockwise direction is open. Do not add any force arm tools during use to avoid structural damage to the gate valve.
- 4.8 When in use, the gate valve should be fully open or fully closed and should not be partially opened to reduce the sealing impact of the water flow on the gate plate and extend the service life.

5 DESCRIPTION AND WORK

It is mainly used to connect or cut off the medium in the pipeline, which is used to control the flow pressure of the fluid and is not suitable for regulating the flow of the medium.

6 MAINTENANCE

- 6.1 Articles must be operated within the values specified in para. 3, para. 4 of this technical passport.
- 6.2 To extend the service life of sealing elements, it is recommended to open / close the HOME CREATOR gate valve at least 1 time in 6 months.

STORAGE AND TRANSPORTATION CONDITIONS

Products are transported in the packaging of the manufacturer in accordance with the rules operating on the mode of transport used.

8 RESOURCES, LIFETIMES AND MANUFACTURER'S (SUPPLIER'S) WARRANTIES

- 8.1 Average full service life of a gate valve: 30 years.
- 8.2 The manufacturer (supplier) guarantees the operability and compliance with the safety requirements of the product if the consumer complies with this technical passport HC-20132.
- 8.3 Warranty period: 36 months from the date of sale to the end user / from the date of commissioning of the object. The warranty covers all defects caused by the manufacturer.
- 8.4 When making claims about the quality of the goods, the buyer provides the following documents:
- 8.4.1 An application in any form, which indicates:
- a) Name of the organization or F. And. About. buyer, actual address, contact phone number;
- b) The name and address of the organization that carried out the installation of the product; c) a brief description of the malfunction of the product.
- 8.4.2 A document confirming the purchase of the product (cash/sales receipt, waybill, receipt, etc.).
- 8.4.3 Photos of the product confirming its malfunction, or the product itself.
- 8.4.4 Act of hydraulic testing of the system in which the product was mounted.
- 8.4.5 Completed warranty card.
- 8.5 The warranty does not cover defects arising from:
- 8.5.1 Violations of the passport regimes of storage, transportation, installation and operation of the product.
- 8.5.2 The presence of traces of extraneous interference in the design of the product.
- 8.5.3 Effects of substances aggressive to the materials of the product.
- 8.5.4 Effects on the product of excessive force.
- 8.5.5 Impact on the product of fire, natural disasters and other force majeure circumstances.
- 8.6 The warranty also does not apply in cases where the manufacturer's markings are partially or completely changed, erased, removed or illegibly visible.
- 8.7 In case of unreasonableness of the claim, the costs of diagnostics and examination of the product are paid by the buyer.
- 8.8 Manufacturer ZHEJIANG HOME CREATOR TECHNOLOGY CO., LTD reserves the right to make changes to the design of the product that do not affect the declared technical characteristics

8.9 Claims for the quality of the goods can be made during the warranty period at the address of the manufacturer HOME CREATOR TECHNOLOGY CO., LTD.

9 CERTIFICATE OF ACCEPTANCE AND PACKAGING

- 9.1 Gate valves packed by the manufacturer.
- 9.2 Packaging ensures the safety of products subject to compliance with clause 7.
- 9.3 The materials and substances used for packaging are safe for people and the environment.
- 9.4 The gate valve is in the open position.
- 9.5 The batch of gate valves is recognized as suitable for operation and is accepted with 100% control at RPR = 2.5 * PW

Date of manufacture		QUALITY Mark	
---------------------	--	--------------	--



NOTE			



Name: WRAS APPROVED GATE VA	LVE	
Article: <u>HC-10502</u>	Quantity:	
Name and Address of the trading organiza	ation:	
Date of Sale:	Seller's full name / Seller's signature, Stamp / seal of the trading organization:	
agree with the terms of the warrant:		
Product Return Mark:		回 外表 (10 2040 (2046)
Buyer's signature:	View your passport Online:	
Nate / Signature:		国中华公 获

WARRANTY PERIOD: 36 MONTHS

Warranty is provided. according to paragraph 8 of the technical passport HC-10502

















