HC-D10312&HC-D10512

Draw Off Cock ***PN16***

Feature & Benefits

- Europe Brass DZR
- Eenable systems to be drained without removing pipework.
- It prevent the build up of sediment that flows through the pipework thus
- extending its life *expectancy to BS 2879



HC-D10312



HC-D10512

Test Pressure & Temperature

Temperature	Hydraulic
-20°C to 120°C	Shell: 24 bar
	Seat: 17.6 bar


Connection Standard

- ISO228-1 parallel thread
- Medium: Water


Materials

NO.	PART	Materials
1	Body	Brass CW602N
2	Gasket	EPDM
3	Stem	Brass
4	O-Ring	EPDM
5	O-Ring	EPDM
6	Nut	Brass

Dimensional Drawing

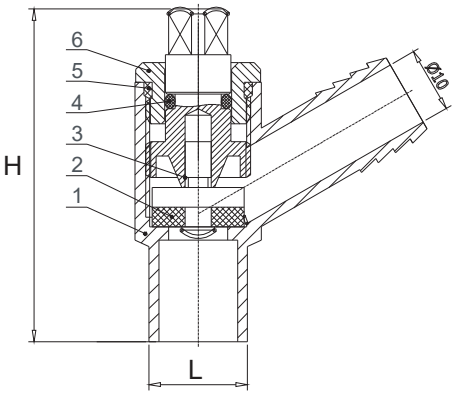

HC-D10312

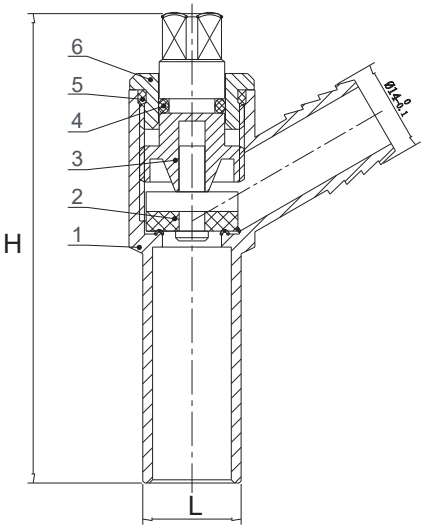

HC-D10512

Installation Dimensions

SIZE (inch)	H (mm)	L (mm)
HC-D10312-1/2"	51	15
HC-D10512-1/2"	72	15