HC-A60205

Brass Service Valve ***PN16***

Feature & Benefits

- WRAS certified
- Europe Brass CW617N
- Copper X swivel union
- Screw driver operated



Test Pressure & Temperature

Temperature	Hydraulic
-10°C to 85°C	Shell: 24 bar
	Seat: 17.6 bar


Connection Standard


- ISO228-1 parallel thread
- Medium: Water

Materials

NO .	PART	Materials
1	Body	Brass
2	Circlip	304
3	O-Ring	EPDM
4	Ball	Brass
5	Stem	Brass
6	O-Ring	EPDM
7	Tube	Brass
8	Nut	Brass
9	Gasket	/
10	Ferrule	T2
11	Nut	Brass
12	Gasket	EPDM

Dimensional Drawing

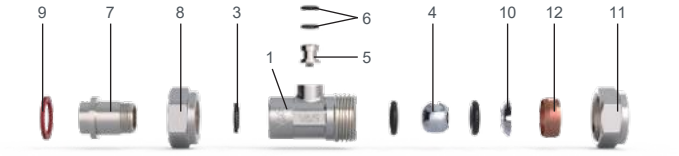

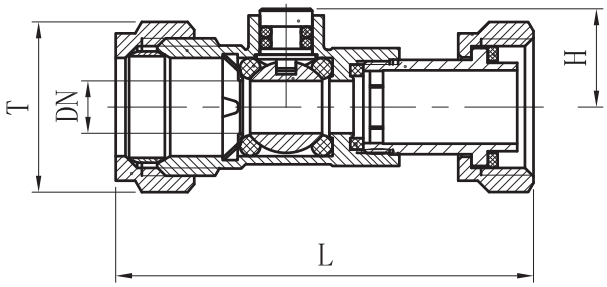

Installation Dimensions

SIZE (inch)	L (mm)	DN (mm)	H (mm)	T
15mm	63	8	15	30
22mm	75	22	17.5	35