HC-99561

Lever Handle Ball Valve ***PN25***

Feature & Benefits

- Brass material are made of brass grade CW617N as per the European standard EN12165.
- Designed to be light, compact and easy to install and operate
- Steel lever handle with anti-corrosion treatment and Blue PVC coating



Test Pressure & Temperature

Temperature	Hydraulic
-20°C to 120°C	Shell: 37.5 bar
	Seat: 27.5 bar


Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Materials


NO.	PART	Materials
1	Nut	Steel
2	Lever handle	Steel
3	Stem	Brass
4	O-ring	NBR
5	Body	Brass
6	Seats	PTFE
7	Ball	Brass
8	Bonnet	Brass

Dimensional Drawing

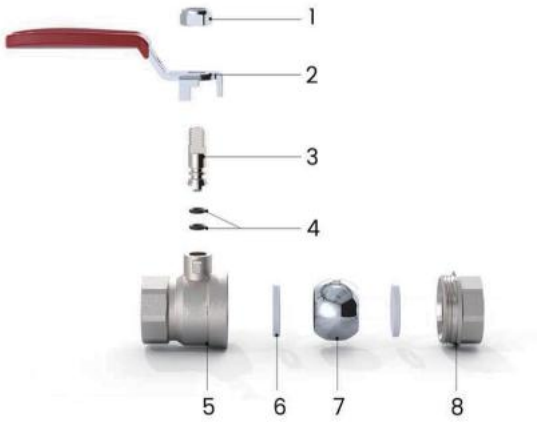

Dimensions

SIZE (inch)	L (mm)	A (mm)	H (mm)	D (mm)	G
1/2"	44	86	47	14	G1/2"
3/4"	51	86	50	18	G3/4"
1"	61	112	61	23	G1"
1-1/4"	74	135	74	30	G11/4"
1-1/2"	85	135	85	34	G11/2"
2"	98	135	98	43	G2"
2-1/2"	125	227	109	57	G2-1/2"
3"	145	227	117	68	G3"
4"	168	236	130	85	G4"

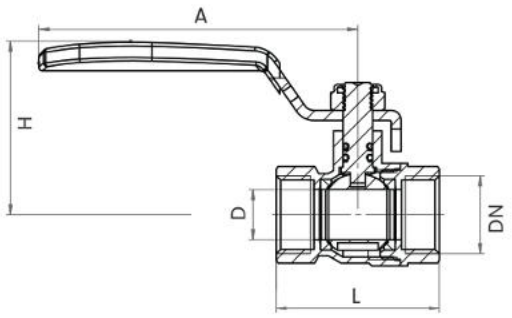

Pressure & temperature ratings

