HC-88881MFDR

Brass Full Port Ball Valve ***PN25***

Feature & Benefits

- WRAS Certified
- Europe Brass CW617N
- Full port
- Designed to be light, compact and easy to install and operate
- Steel lever handle with anti-corrosion treatment and Blue PVC coating
- Valves are Tested in Accordance with BSEN 13828 standards
- CW617N material is available HC - 88881MF



Test Pressure & Temperature

Temperature	Hydraulic
-20°C to 120°C	Shell: 37.5 bar
	Seat: 27.5 bar


Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Materials


NO.	PART	Materials
1	Nut	Brass
2	Lever handle	Steel
3	Packing Nut	Brass
4	Seats	PTFE
5	Stem	Brass
6	Bonnet	DZR Brass CW602N
7	Ball	Brass
8	Washer	PTFE
9	Body	DZR Brass CW602N

Dimensional Drawing

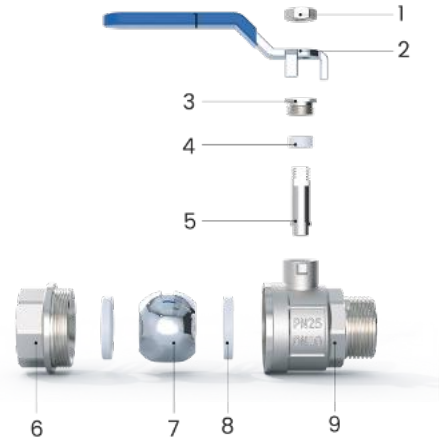

Dimensions

SIZE (inch)	A (mm)	B (mm)	B1 (mm)	C (mm)	D (mm)	H (mm)
1/2"	54	13	13	92	15	51.6
3/4"	61.4	13.5	13.5	92	20	57.5
1"	72	16	16	115.5	25	63.5
1 1/4"	85.5	17	17	129.5	32	72.9
1 1/2"	101.5	19.5	19.5	129.5	39.5	78.5
2"	119.7	20	20	156	50	93.9

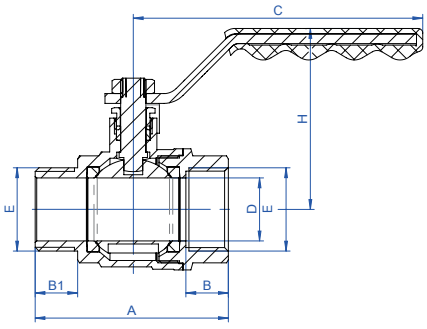

Pressure & temperature ratings

