HC-88881MFTDR

Brass Full Port Ball Valve ***PN25***



Feature & Benefits

- WRAS Certified
- Europe Brass CW617N
- Full port
- Designed to be light, compact and easy to install and operate
- Butterfly handle
- Valves are Tested in Accordance with BSEN 13828 standards
- CW617N material is available HC - 88881MFT

Test Pressure & Temperature

Temperature	Hydraulic
-20°C to 120°C	Shell: 37.5 bar
	Seat: 27.5 bar


Connection Standard


- ISO228-1 parallel thread
- Medium: Water

Materials

NO.	PART	Materials
1	Nut	Brass
2	Handle	Aluminum
3	Packing Nut	Brass
4	Seats	PTFE
5	Stem	Brass
6	Body	DZR Brass CW602N
7	Washer	PTFE
8	Ball	Brass
9	Bonnet	DZR Brass CW602N

Dimensional Drawing

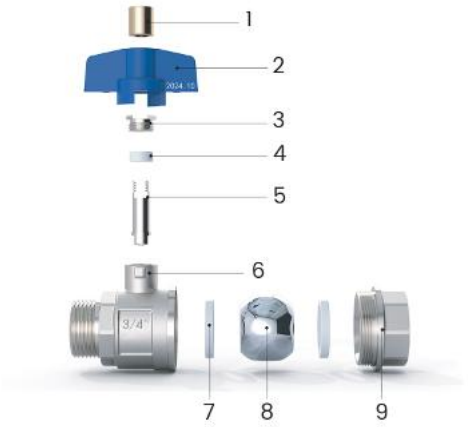

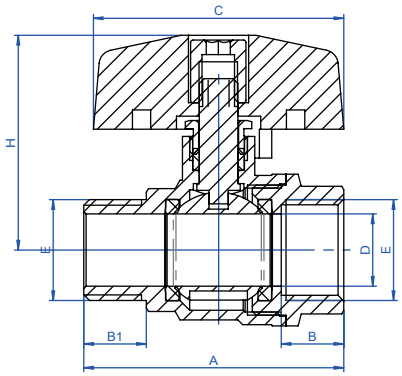

Dimensions

SIZE (inch)	A (mm)	B (mm)	B1 (mm)	C (mm)	D (mm)	H (mm)
1/4"	48.1	13	10	52	8	38.4
3/8"	49.6	11.2	11.5	52	10	40.2
1/2"	54	13	13	52	15	44.6
3/4"	61.4	13.5	13.5	52	20	50.5
1"	72	16	16	69	25	54

Pressure & temperature ratings

