HC-77972

Union Ball Valve *PN 25*



Feature & Benifits

- Europe Brass CW617N
- Full port
- Designed to be light, compact and easy to install and operate
- Steel lever handle with anti-corrosion treatment and Blue PVC coating
- Valves are Tested in Accordance with BSEN 13828 standards

Test Pressure & Temperature

Tempreture	Hydraulic
-10°C to 95°C	Shell: 37.5 bar
	Seat: 27.5 bar


Connection Standard


- PPR
- Medium: Water

Materials

NO.	Part	Materials
1	Body	Brass CW617N
2	Bonnet	Brass CW617N
3	Seat	PTFE
4	Ball	Brass
5	Stem	Brass
6	Packing	PTFE
7	Packing Nut	Brass
8	O-ring	VMQ
9	PPR Union	PPR
10	Nut	Brass
11	Handle	Q235
12	Washer	304
13	Nut	304

Dimensional Drawing

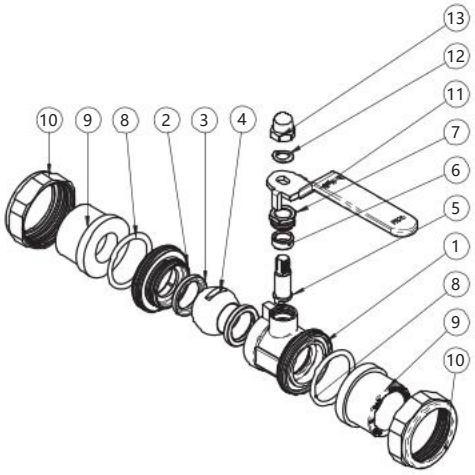

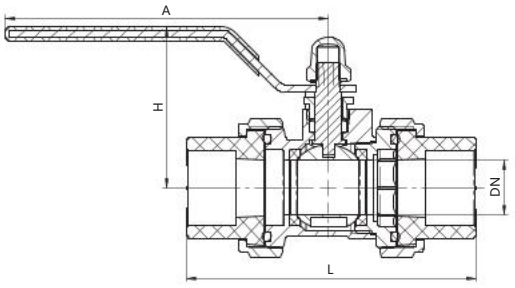

Dimensions

SIZE	DN	H (mm)	A (mm)	L (mm)
20x20	13	47	106	84
25x25	18	53	106	95
32x32	21	62	120	105
40x40	25	65	120	115
50x50	32	79	141	133
63x63	40	93	154	148
75X75	50	113	219	166
90X90	61	120	219	185
110X110	75	129	280	205

Pressure & temperature ratings

