HC-99011DR

DZR Bibcock with Lever Handle ***PN16***

Feature & Benefits

- Europe DZR Brass 12164 CW602N Dezincification Resistant Brass
- Hose union connection
- Water and oil service
- Fixed to stand wall plate elbows
- CW617N material is available, item No. HC-99011



Test Pressure & Temperature

Temperature	Hydraulic
0°C to 100°C	Shell: 24
	Seat: 17.6

Materials

NO.	PART	Materials
1	Nut	Stainless Steel
2	Handle	Steel
3	Stem	Brass
4	O-Ring	NBR
5	Body	DZR CW602N
6	Diverter	ABS
7	Washer	NBR
8	Outlet	Stainless Steel
9	Cap	Brass
10	Ball	Brass
11	Seat	PTFE
12	Bonnet	DZR CW602N


Installation Dimensions


SIZE (inch)	D (mm)	H (mm)	d (mm)
1/2"x3/4"	86	43	10
3/4"x1"	86	44.6	12
1"x11/4"	112	54.4	13.5

Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Dimensional Drawing

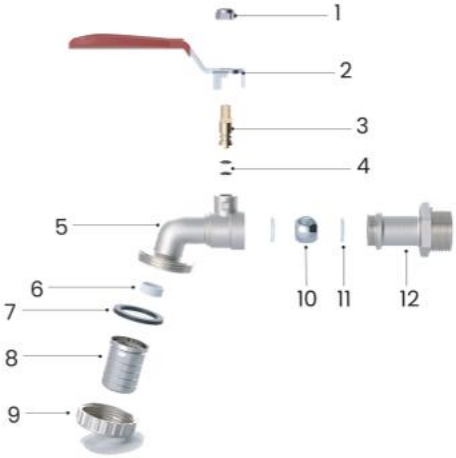

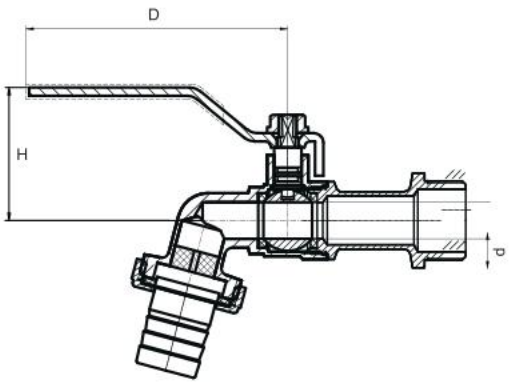

Pressure & temperature ratings

