HC-10322

DZR Hose Bibs

125PSI



Feature & Benefits

- Europe DZR Brass 12164 CW602N Dezincification Resistant Brass
- Designed standard: CSA B125.1-11 Standard

Test Pressure & Temperature

Temperature	Hydraulic
5°C to 71°C	Shell: 187.5 PSI
	Seat: 137.5 PSI


Connection Standard

- US END CONNECTION: ANSI B1.20.1
- Medium: Water
- ISO228-1parallel thread

Material

NO.	Part	Material
1	Body	DZR Brass CW602N
2	Bonnet	DZR Brass CW602N
3	Gasket	PTFE
4	Stem	Brass
5	gland	EPDM
6	gland	EPDM
7	Adjustable nut	Brass
8	Handle	Cast Iron
9	Nameplate	Aluminum
10	Nut	Stainless Steel

Dimensional Drawing

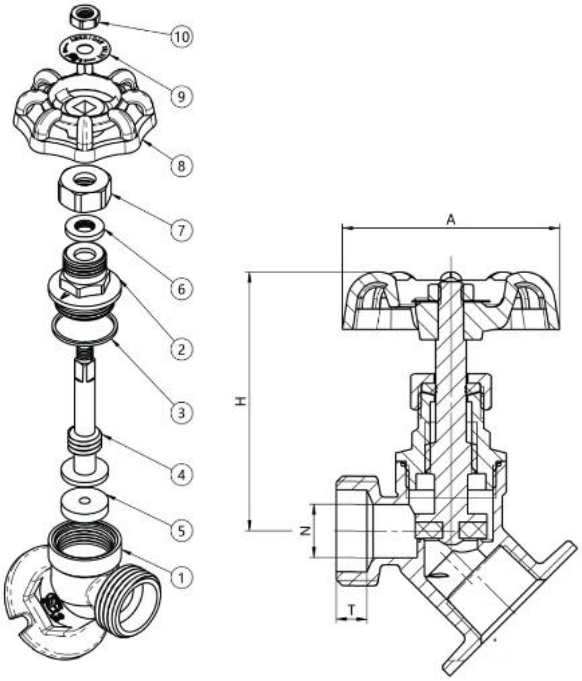

Dimensions

SIZE (inch)	H (mm)	A (mm)	N (mm)	T (mm)
1/2"x3/4"	63	53	13	8
3/4"x3/4"	63	53	13	8

Pressure & temperature ratings

