HC-12412

Brass Stop Valve ***PN16***

Feature & Benefits

- Europe Brass CW617N
- Hot or Cold
- Female iron x female iron
- Include rosette



Test Pressure & Temperature

Temperature	Hydraulic
3°C to 80°C	Shell: 24 bar
	Seat: 17.6 bar


Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Materials

NO.	PART	Materials
1	Body	Brass CW617N
2	Rubber Matt	EPDM
3	Screw with Stop Plate	Brass CW617N
4	Bonnet	Brass CW617N
5	O-Ring	EPDM
6	Filler	PTFE
7	Decorative Cover	H62
8	Rubber Pad	EPDM
9	Cap	Brass CW617N
10	Nozzes	ZN
11	Hand Wheels	ZN
12	Plastic Buckle-Red	PP
13	Plastic Buckle-Blue	PP

Dimensional Drawing

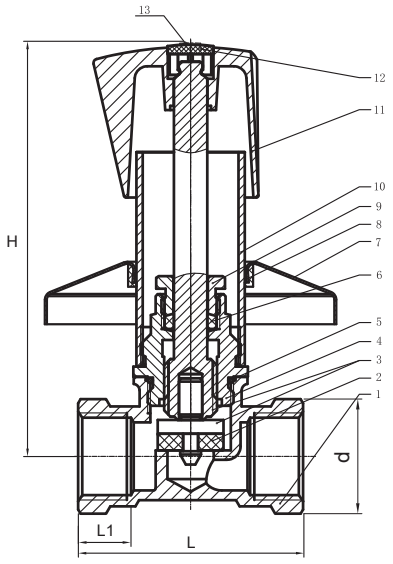

Installation Dimensions

SIZE (inch)	L (mm)	L1 (mm)	H (mm)	d (mm)
1/2"	54	12.7	100	25.4
3/4"	58.7	14	100	32.5

Pressure & temperature ratings

