HC-S20105LS

DZR Stop Valve ***PN16***

Feature & Benefits

- WRAS certified
- Europe DZR Brass 12164 CW602N Dezincification Resistant Brass
- Crutch top
- Compression x compression
- BS 1010



Test Pressure & Temperature

Temperature	Hydraulic
0°C to 90°C	Shell: 24 bar
	Seat: 17.6 bar


Connection Standard

- Compression version supplied with ends complying with BS EN 1254-2 for use with BS EN 1057 R250 (half hard) copper tube

Materials

NO.	PART	Materials
1	Body	DZR Brass CW602N
2	Rubber Mat	NBR
3	Screw	Brass
4	Flat Washer	PTFE
5	Bonnet	DZR Brass CW602N
6	Filler	Graphite
7	Press Cap	Brass
8	Handle	Brass
9	Head Screw	Brass
10	Ring	Brass
11	Nut	DZR Brass CW602N

Dimensional Drawing

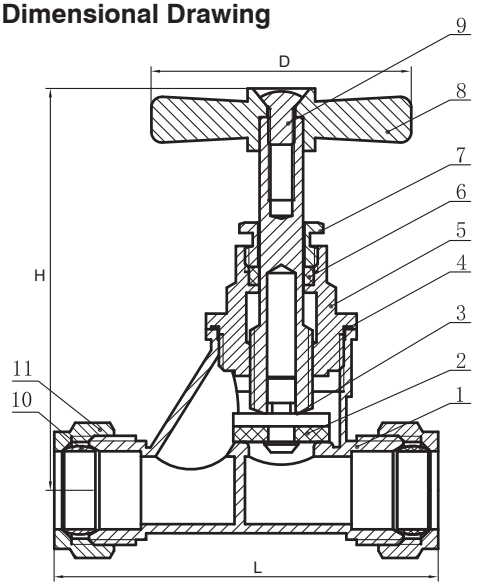

Installation Dimensions

SIZE (inch)	L (mm)	H (mm)	D (mm)
15mm	73.5	77.3	50
22mm	92.1	86.5	54
28mm	105.3	94.5	62

Pressure & temperature ratings

