
HC-62002

Brass Manifolds with shutoff valves ***PN16***

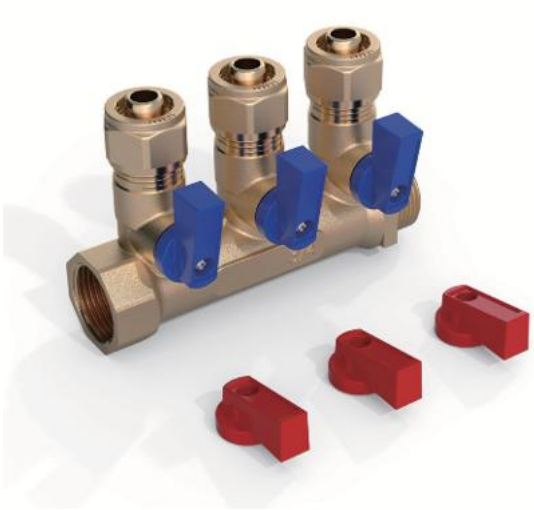

Feature & Benefits

- Europe Brass CW617N
- Copper X swivel union
- Screw driver operated

Test Pressure & Temperature

Temperature	Hydraulic
-20°C to 120°C	Shell: 24 bar
	Seat: 17.6 bar


Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Materials

NO.	PART	Materials
1	Body	Brass CW617N
2	Bonnet	Brass CW617N
3	Sealing Seat	PTFE
4	Valve Ball	Brass CW617N
5	Valve Stem	Brass CW617N
6	O-Ring	EPDM
7	Handle	AL
8	Head Screw	Q235
9	O-Ring	EPDM
10	Water Outlet	Brass CW617N
11	Shim	ABS
12	Card Holder	H65
13	Hexagon Hat	Brass CW617N

Dimensional Drawing

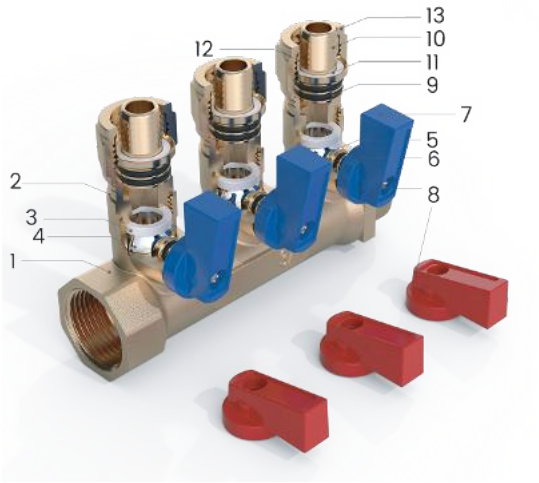

Installation Dimensions

SIZE (inch)	L (mm)	L1 (mm)	L2 (mm)	H (mm)	D (mm)
1/2"x3/4"-2 Way(16mmx2. 2)	83	14	12.5	65.2	36
1/2"x3/4"-3 Way(16mmx2. 2)	119	14	12.5	65.2	36
1/2"x3/4"-4 Way(16mmx2. 2)	155	14	12.5	65.2	36

