HC-61002

Brass Manifolds

PN16

Feature & Benefits

- Europe Brass CW617N
- Copper X swivel union
- Screw driver operated



Test Pressure & Temperature

Temperature	Hydraulic
-20°C to 120°C	Shell: 24 bar
	Seat: 17.6 bar


Connection Standard

- ISO228-1 parallel thread
- Medium: Water

Materials

NO.	PART	Materials
1	Body	Brass CW617N
2	O-Ring	EPDM
3	Water Outlet	Brass CW617N
4	Gasket	ABS
5	Card Holder	H65
6	Hexagonal Hat	Brass CW617N

Dimensional Drawing

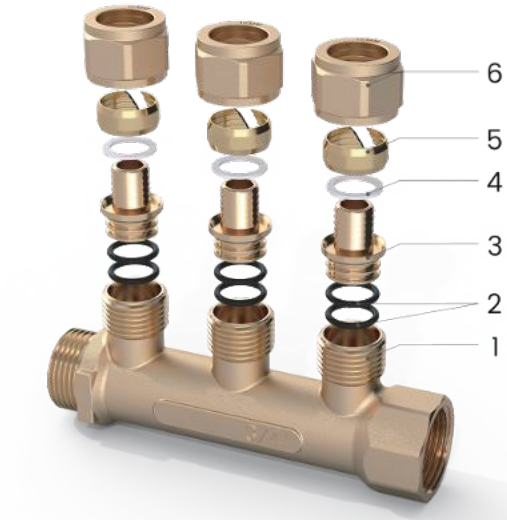

Installation Dimensions

SIZE (inch)	L (mm)	L1 (mm)	L2 (mm)	H (mm)	D (mm)
16mmx1/2"x2.2mm(2 ways)	90	12.5	15	48.3	36
16mmx1/2"x2.2mm(3 ways)	126	12.5	15	48.3	36
16mmx1/2"x2.2mm(4 ways)	162	12.5	15	48.3	36

