
HC-1100Y&HC-11692

Flexible Hoses & Brass Coupling *PN 25*

Feature & Benifits

- To enhance system reliability and installation flexibility,
- PICV Kits can be ordered with flexible hoses.
- These effectively isolate terminal unit vibrations from the rest of the piping system, while also simplifying alignment
- where pipework does not directly line up with equipment
- connections. Choose between corrugated or braided variants
- based on your performance needs.

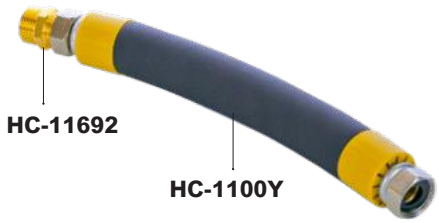

Materials

NO.	Part	Materials
1	Body	SUS304+thermal insulation cotton
2	Hexagonal Nut	DZR Brass CW602N
3	Washer	EPDM
4	Coupling	DZR Brass CW602N

Connection Standard

- ISO228-1 parallel thread
- EN10226-2(ISO7-1)formerly BS 21

Installation Dimensions

Flexible Hoses	SIZE	A (mm)	B (mm)
HC-1100Y	DN15	200	G1/2”
HC-1100Y	DN15	300	G1/2”
HC-1100Y	DN15	500	G1/2”
HC-1100Y	DN20	200	G3/4”
HC-1100Y	DN20	300	G3/4”
HC-1100Y	DN20	500	G3/4”
HC-1100Y	DN25	200	G1”
HC-1100Y	DN25	300	G1”
HC-1100Y	DN25	500	G1”

Brass Coupling	SIZE	C (mm)	D (mm)
HC-11692	DN15	31.5	G1/2”
HC-11692	DN20	34	G3/4”
HC-11692	DN25	35.5	G1”

Dimensional Drawing

